




MAX

Homogeneous Vinyl Sheet

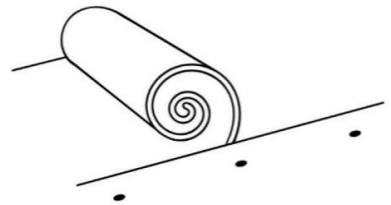

Creating Life On The Floor You Walk On!



JPL19-1101



JPL19-1102




JPL19-1103




JPL19-1104



JPL19-1105

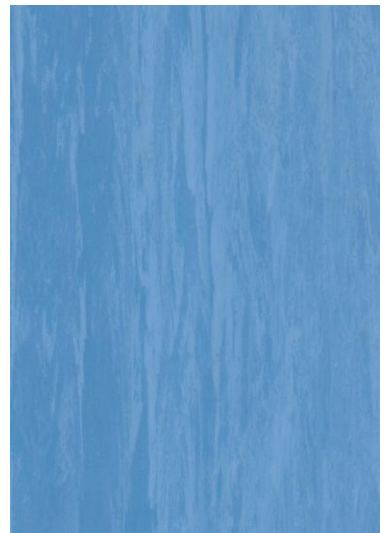

JPL19-1106

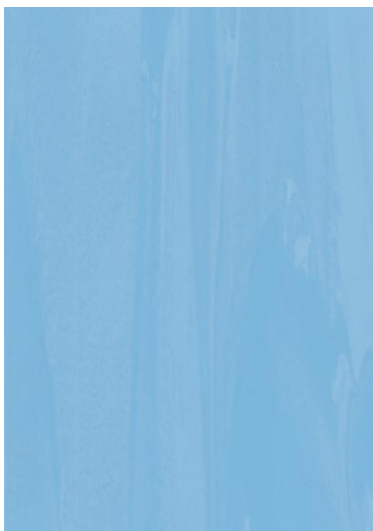

JPL19-1107



JPL19-1108



JPL19-1109



JPL19-1110



JPL19-1111



JPL19-1112



JPL19-1113



JPL19-1114



JPL19-1115



JPL19-1116



JPL19-1117



JPL19-1118




JPL19-1119



JPL19-1120



JPL19-1121

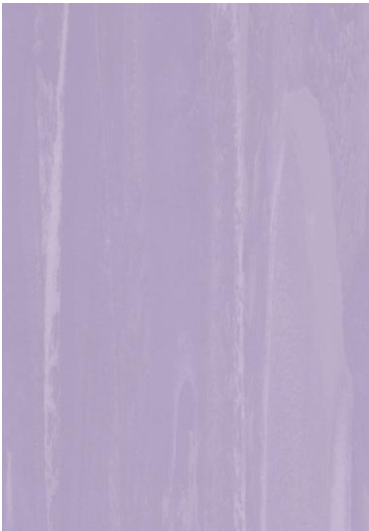

JPL19-1122



JPL19-1123



JPL19-1124

DATA SHEET

JPL Floors™ homogeneous vinyl flooring meets the below requirement :-

TECHNICAL DATA		MAX
Total Thickness	EN 428	2.0mm
Weight	EN 430	3400 g/m2
Width of Sheet	EN 426	2m
Length of Sheet	EN 426	20m
Coverage per roll	-	
Colours	-	24
CLASSIFICATION		
Reaction to Fire	EN 13501-1	Bfl-s1
Toxic Fumes	BS 6853:1999	R < 0.3
Hazardous Substances	EN 13130 - 4:2004	Not detected
PERFORMANCE		
Abrasion Resistance	EN 660-2	Group P
Dimensional Stability	EN 434	0.14%
Curling on Exposure to Heat	EN 434	0.06mm
Residual Indentation	EN 433	~0.04mm
Color Fastness	EN ISO 105-B02	≥6
Flexibility	EN 435	No Crack
Chemical & Stain Resistance	EN 423	Pass
Body Voltage	EN 1815	≤ 2kV
Slip Resistance	D 51130:2014	R9
Anti-Bacteria Resistance (Staphylococcus aureus)	ISO 846:1997	Does not promote bacteria growth
Anti-Fungus Resistance	ISO 846:1997	Does not promote fungal growth
TVOC	ISO 16000	Pass
Formaldehyde Emission	ASTM D5116	E1

