




SONIC


Homogeneous Vinyl Sheet

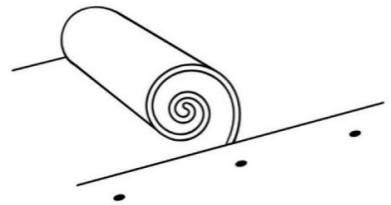

Creating Life On The Floor You Walk On!




JPL19-4651

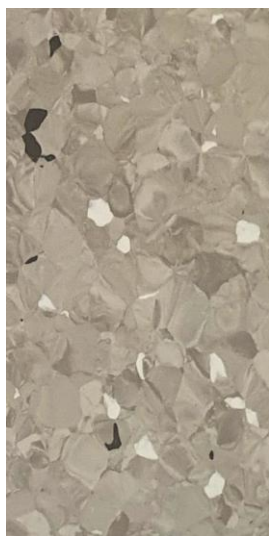

JPL19-4655



JPL19-4652

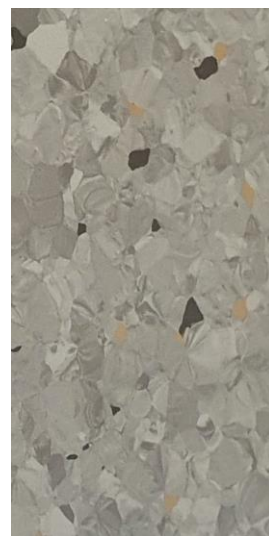

JPL19-4683



JPL19-4691



JPL19-4678



JPL19-4657



JPL19-4685




JPL19-4688



JPL19-4675



JPL19-4658

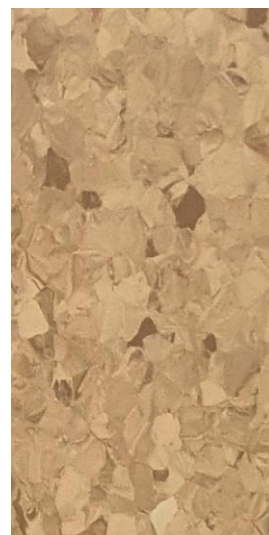

JPL19-4659



JPL19-4684



JPL19-4670



JPL19-4672



JPL19-4671



JPL19-4687



JPL19-4692



JPL19-4693




JPL19-4661



JPL19-4642




JPL19-4644

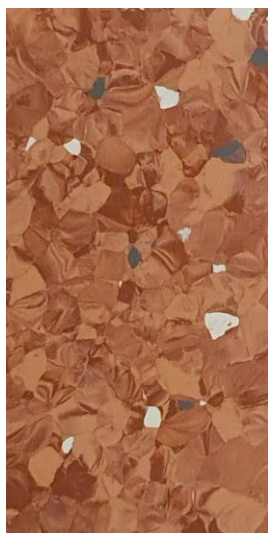


JPL19-4662




JPL19-4660

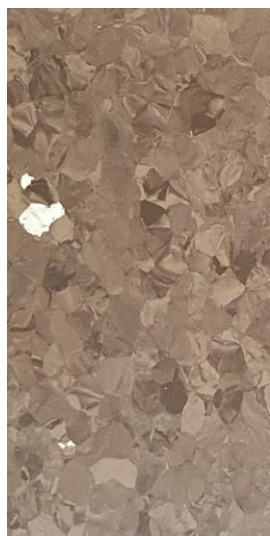

JPL19-4676

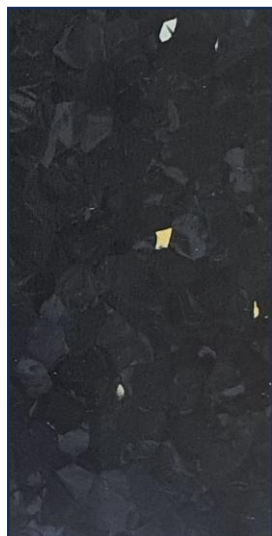


JPL19-4654

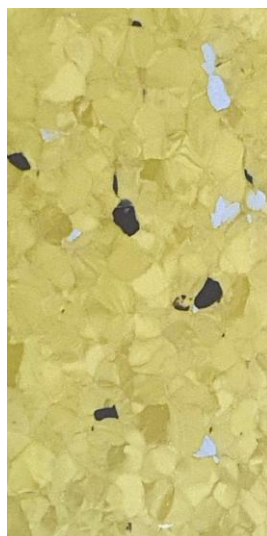


JPL19-4686



JPL19-4643

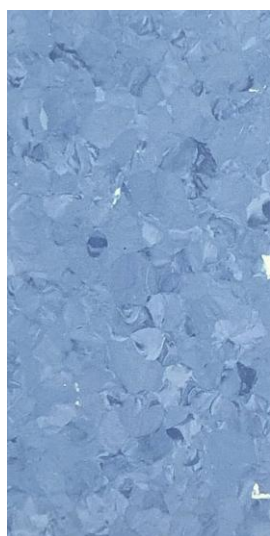

JPL19-4662

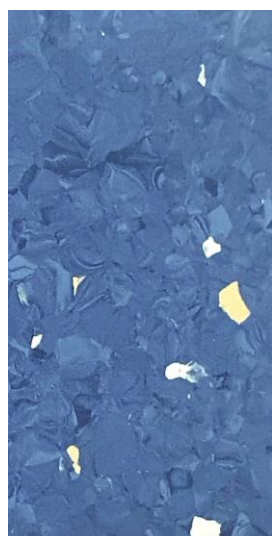

JPL19-4666



JPL19-4695



JPL19-4682



JPL19-4681



JPL19-4694



JPL19-4679




JPL19-4680



JPL19-4674



JPL19-4673

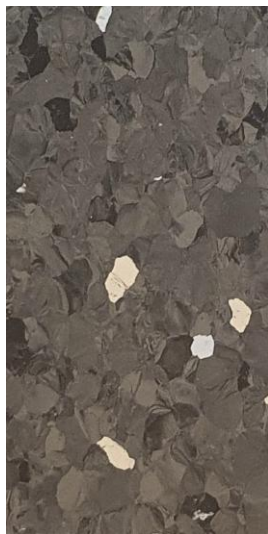

JPL19-4656



JPL19-4689

DATA SHEET

JPL Floors™ homogeneous vinyl flooring meets the below requirement :-

		SONIC
Total Thickness	EN 428	2.0mm
Weight	EN 430	2850 g/m2
Width of Sheet	EN 426	2m
Length of Sheet	EN 426	20m
Coverage per roll	-	
Colours	-	40
CLASSIFICATION		
Reaction to Fire	EN 13501-1	Bfl-s1
Toxic Fumes	BS 6853:1999	R < 0.3
Hazardous Substances	EN 13130 - 4:2004	Not detected
PERFORMANCE		
Abrasion Resistance	EN 660-2	Group T
Dimensional Stability	EN 434	0.14%
Curling on Exposure to Heat	EN 434	0.06mm
Residual Indentation	EN 433	~0.04mm
Color Fastness	EN ISO 105-B02	≥6
Flexibility	EN 435	No Crack
Chemical & Stain Resistance	EN 423	Pass
Body Voltage	EN 1815	≤ 2kV
Slip Resistance	D 51130:2014	R9
Anti-Bacteria Resistance (Staphylococcus aureus)	ISO 846:1997	Does not promote bacteria growth
Anti-Fungus Resistance	ISO 846:1997	Does not promote fungal growth
TVOC	ISO 16000	Pass
Formaldehyde Emission	ASTM D5116	Pass

