




STONELINE

Luxury Vinyl Tile



Creating Life On The Floor You Walk On!



JPL-2250E



JPL-2250A




JPL-2250D




JPL-2250C




JPL-2250B

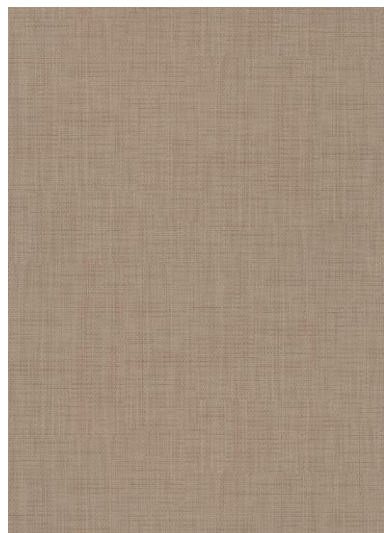

JPL-2213C

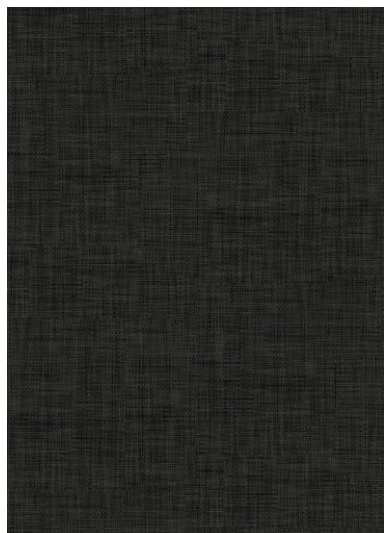


JPL-2213I

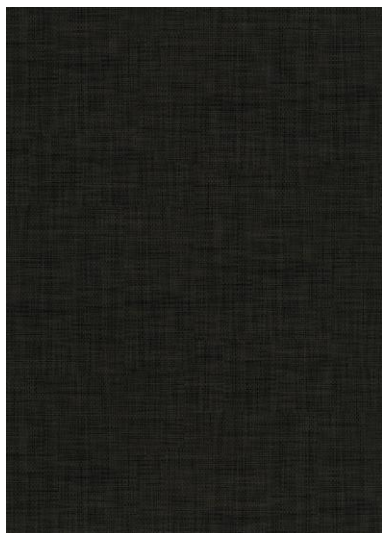


JPL-2213H




JPL-2212B

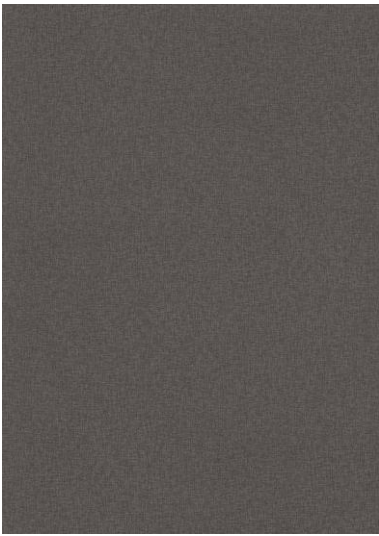

JPL-2212E

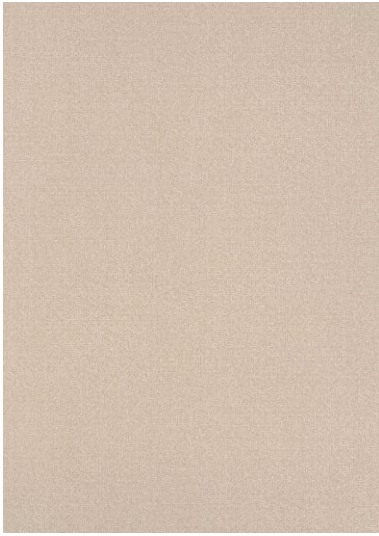

JPL-2207F

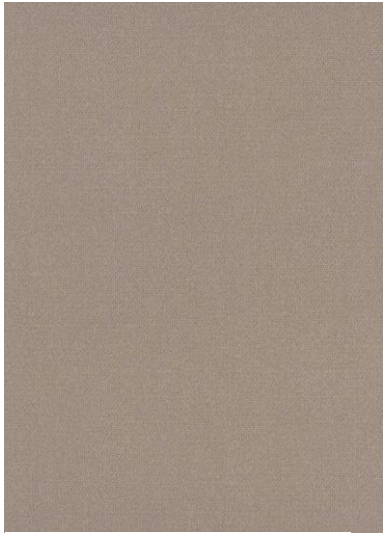

JPL-2207A



JPL-2266C



JPL-2266B



JPL-2266D





JPL-2319R



JPL-2319Q



JPL-2319O



JPL-2319P



JPL-2319C



JPL-2319B




JPL-2319A



JPL-2319E



JPL-2319M

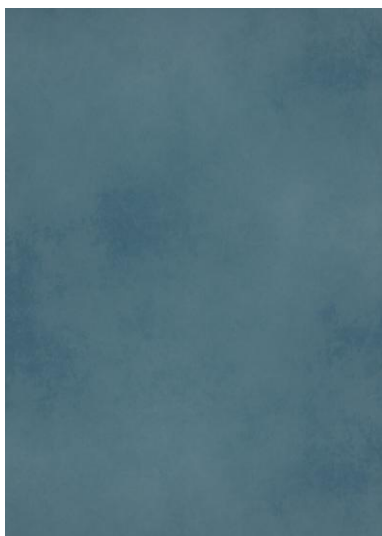

JPL-2319L



JPL-2319J



JPL-2319K



JPL-2319F



JPL-2319G



JPL-2319H



JPL-2319I



JPL-2319D



JPL-2319S



JPL-2319T



JPL-2319N



JPL-2275I



JPL-2275H



JPL-2275G




JPL-2275L



JPL-2275M



JPL-2275B

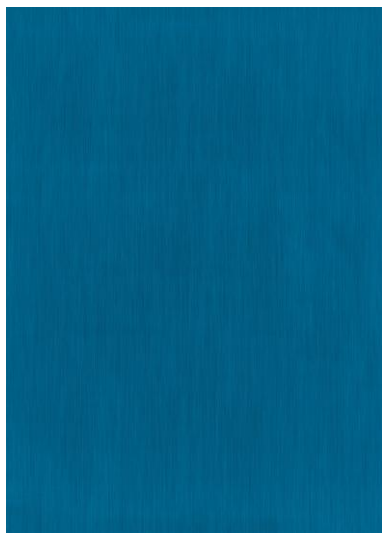


JPL-2275A




JPL-2275N



JPL-2275C

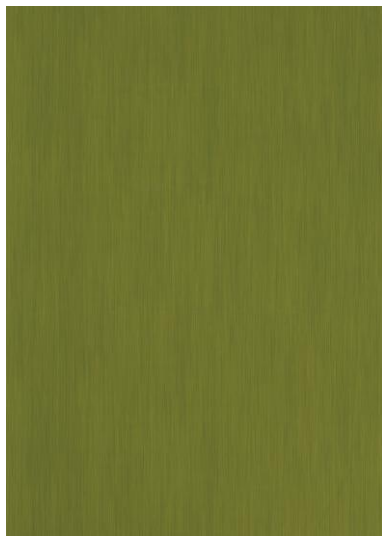

JPL-2275K

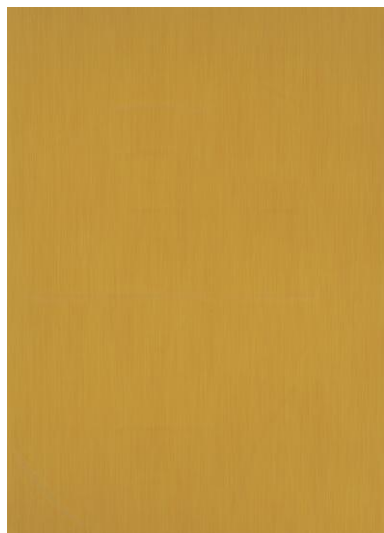

JPL-2275J



JPL-2275E



JPL-2275F



JPL-2227D




JPL-2227A



JPL-2204A




JPL-2204B

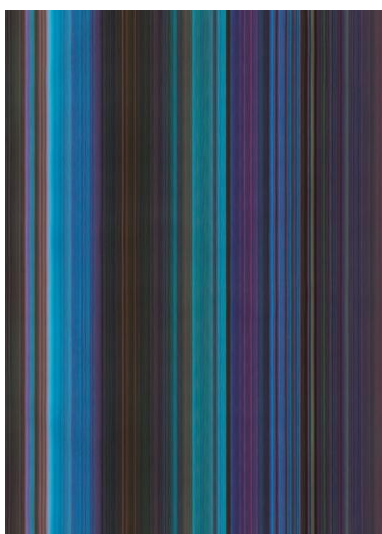

JPL-2201E



JPL-2201B

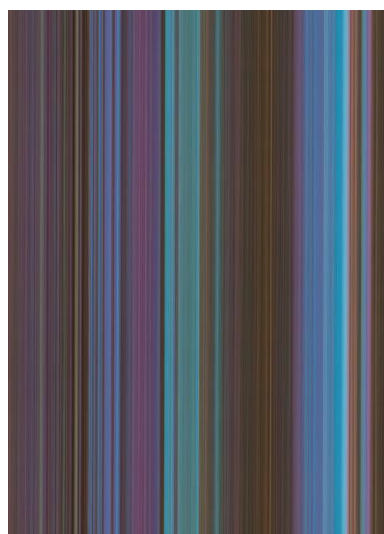

JPL-2201C



DATA SHEET

JPL Floors™ luxury vinyl tile meets the below requirement :-

		Stoneline Luxury Vinyl Tile
Available Sizes		12" x 12" / 12" x 18" / 18" x 18" / 18" x 36" / 36" x 36"
Available Thickness		2.0mm / 2.5mm / 3.0mm / 4.2mm
Custom-Made Sizes / Thickness		Please contact our sales personnel for more info
Custom-Made Colour		Please contact our sales personnel for more info
Packaging		36sq ft per box for all size and thickness
Colours		55
CLASSIFICATION		
Fire Rating	EN 13501-1	Bfl-s1
	ASTM E648-08	Class 1
Toxic Fumes	EN BS 6853:1999	Passed
Smoke Density	ASTM E662-06	Passed requirement of 450 or less
PERFORMANCE		
SGBC	SGBP 4072	Very Good
Heat Stability	ASTM F1514	Passed
Light Stability	ASTM F1515	Passed
Flexibility	ASTM F137-03	Passed
Coefficient of Friction (COF)	ASTM C1028-96	Passed
Impact Insulation Class	ASTM E989-06	△IIC 6 (less than 3dB)
Anti-Bacteria Resistance (Staphylococcus aureus / E. Coli)	ISO 846:1997	Does not promote bacteria growth
TVOC	ISO 16000	Passed
Formaldehyde Emission	ASTM D5116	Passed
Chemical Resistance ASTM F925-02 (24 hrs)	5% Acetic Acid	No Change
	5% Ammonia	No Change
	5% Hydrochloric Acid	No Change
	70% Isopropyl Alcohol	No Change
	5% Phenol	No Change
	5% Sodium Hydroxide	No Change
	Bleach	No Change
	Gasoline	No Change
	Kerosene	No Change
	Mineral Oil	No Change
	Olive Oil	No Change
	Sulfuric Acid	No Change